





Example Configuration 3: Asymmetric (5 DL slots, 1 UL slots)


FIG. 4

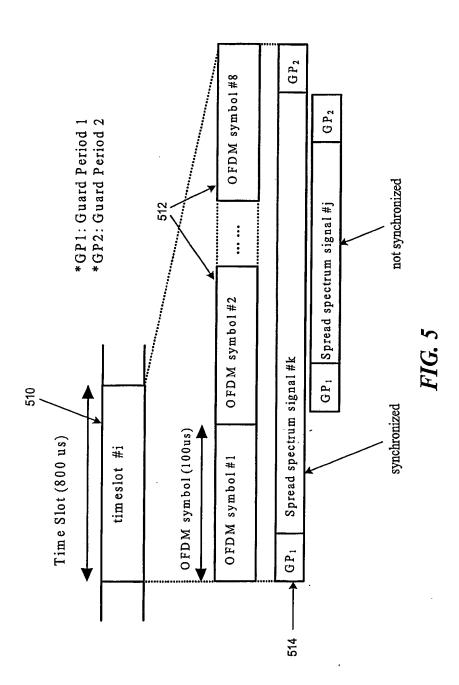


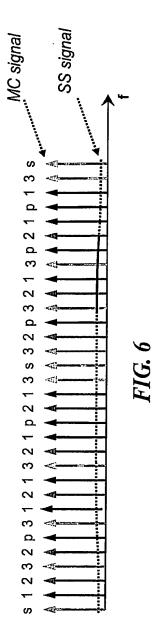

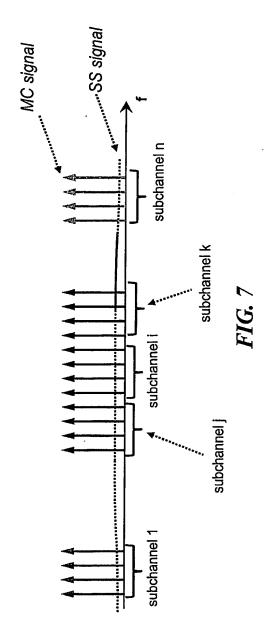


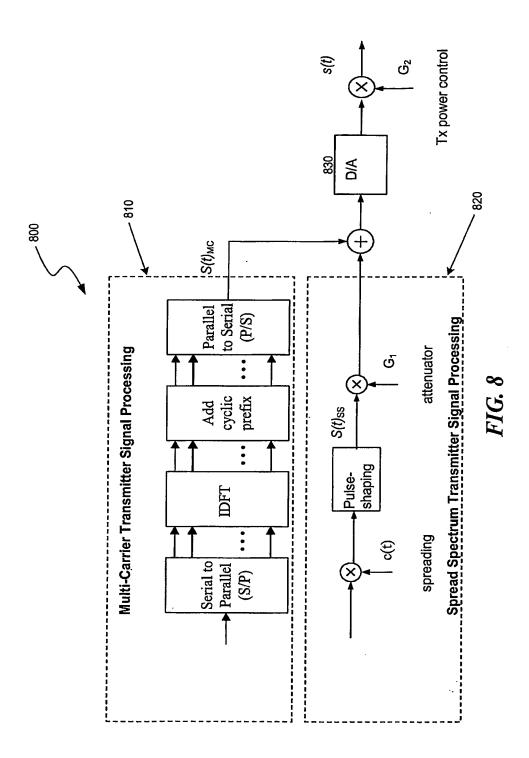

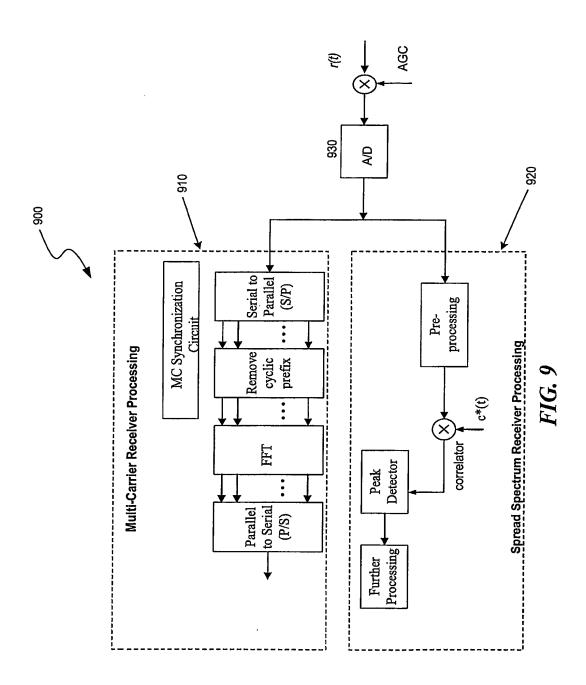

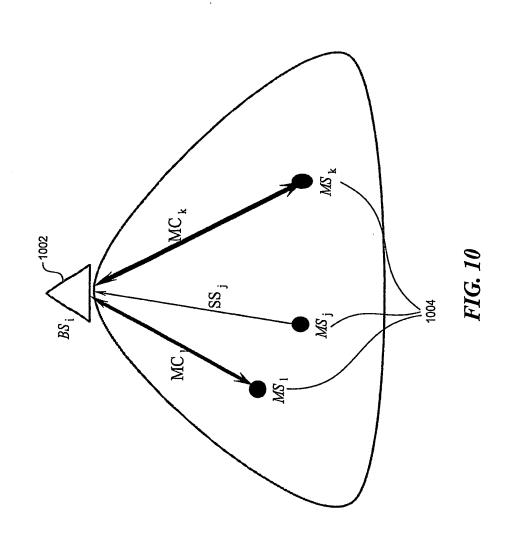



11/18

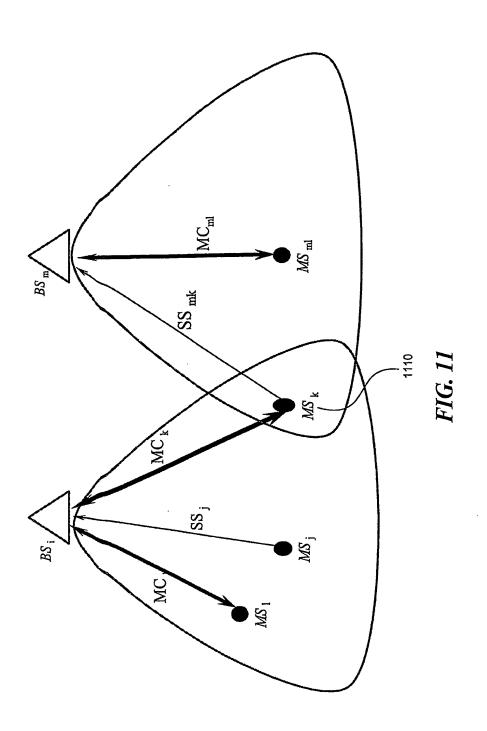



WO 2005/074166 PCT/US2005/003518


12/18

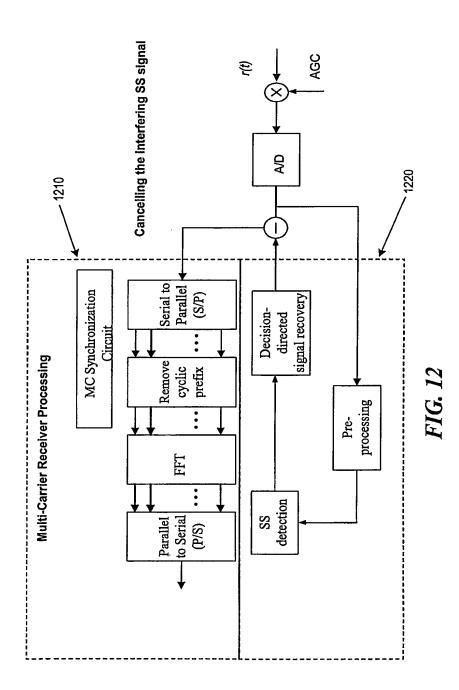

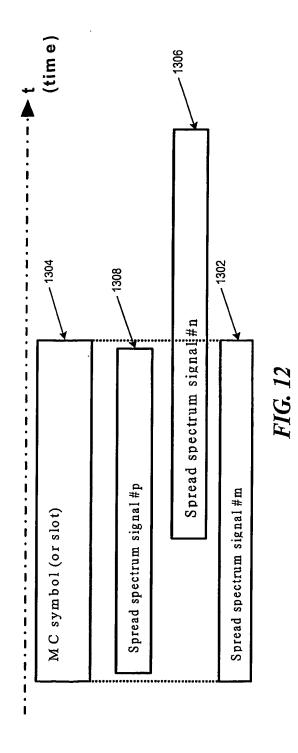

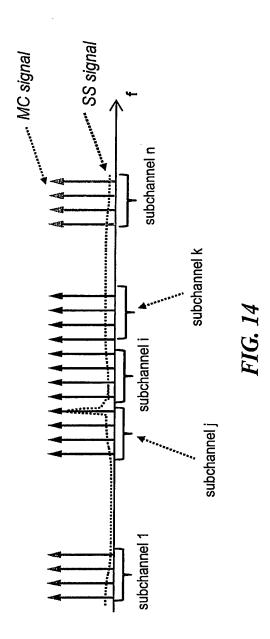

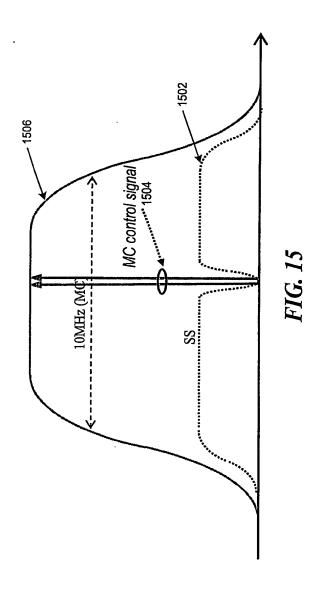

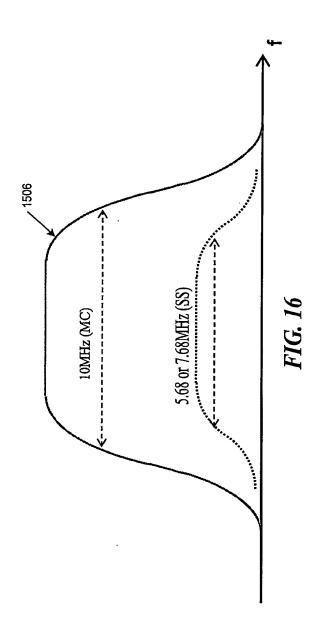

WO 2005/074166 PCT/US2005/003518

17/18

